

HCH-7006-CHG

Six-Bay MC70-Li Battery Charger

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to +40°C
Storage Range: -40°C to +85°C

Dimensions:

Width: 6.25 inches (159 mm)
Length: 7.75 inches (165 mm)
Height: 2.2 inches (66 mm) - without
batteries or devices inserted.
Weight: 1.2 pounds (0.54 Kg)

Warranty:

Each charger is guaranteed to be free from defects in materials and workmanship for 24 months from date of shipment under normal use.



Compatible Batteries:


- HMC70-Li(22) Honeywell® Battery
- HMC70-Li(36) Honeywell® Battery
- HMC70-Li(48) Honeywell® Battery

- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.



Trademarks are the sole property of their respective owners.
The Honeywell® Trademark is used under license from Honeywell® International Inc.

11.09.27

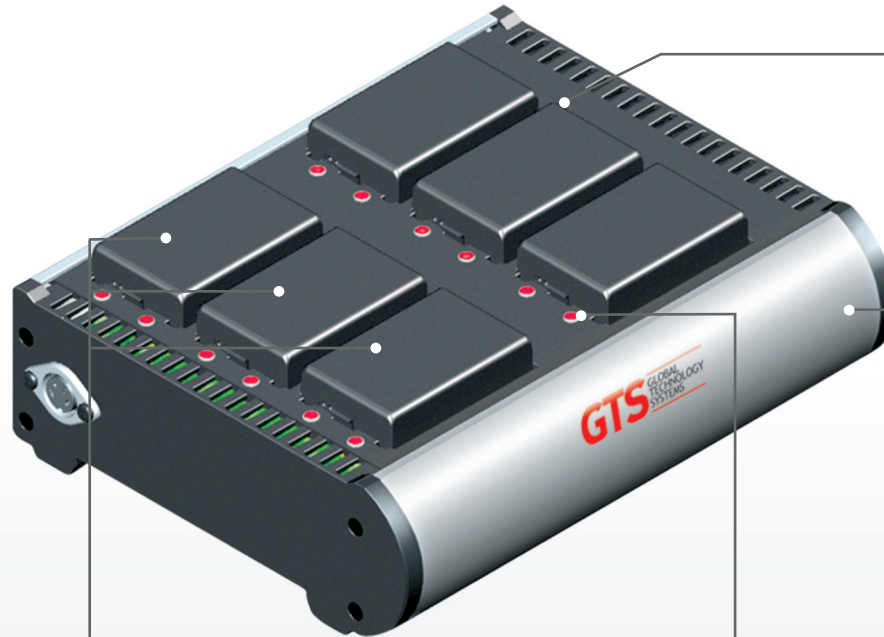

Dual-chemistry charger
Supports Li-Ion and Li-Polymer chemistries.

Hassle-free mounting
Utilizes same mounting bracket as Symbol® chargers for easy wall mounting.

Made of highly rugged aerospace grade aluminium housing.

Includes power supplies, cables & in vehicle mounting kit.

More charging in less space
Charges 50% more batteries in same space as OEM charger.

Tri-color charging indications
A charging LED indicates charging status.



For Pricing or Additional Information Contact:

Global Technology Systems, Inc.
550 Cochituate Road Framingham, MA 01701
800.267.2711 ■ In Europe call: 00800.5390.5390
www.GTSpower.com

