

HCH-7033-CHG

Cradle & Battery Charger

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to +40°C
Storage Range: -10°C to +50°C

Dimensions:

Width: 6.3 inches (160 mm)
Length: 16.5 inches (420 mm)
Height: 4.5 inches (114 mm) - without batteries or devices inserted.
Weight: 2.6 lb (1150 g)

Warranty:

Each charger is guaranteed to be free from defects in materials and workmanship for 24 months from date of shipment under normal use.



Compatible Batteries:


- HMC70-Li(22) Honeywell® Battery
- HMC70-Li(36) Honeywell® Battery
- HMC70-Li(48) Honeywell® Battery

- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.



Trademarks are the sole property of their respective owners.
The Honeywell® Trademark is used under license from Honeywell® International Inc.

11.09.27

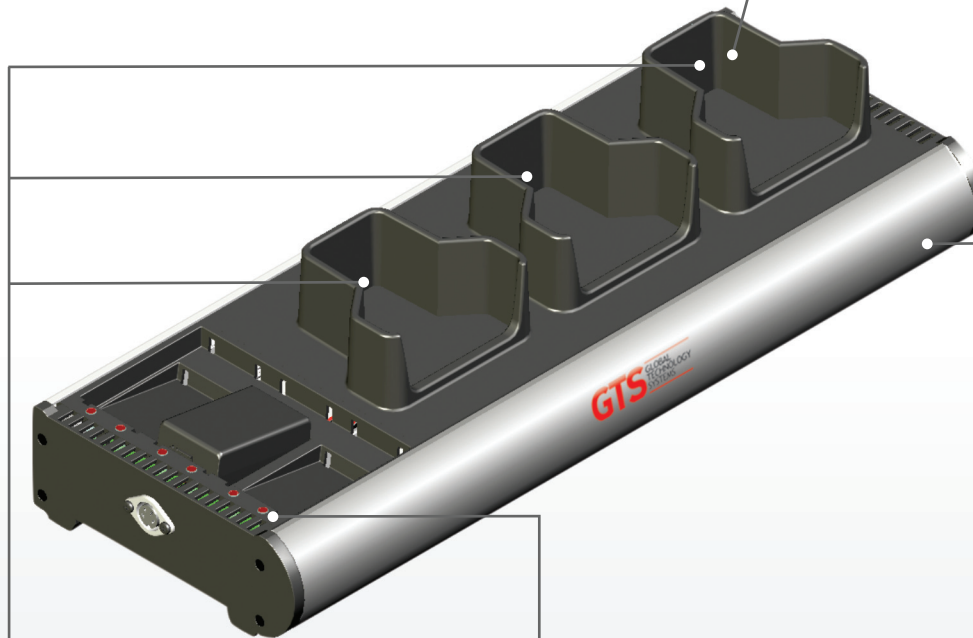

Dual-chemistry charger

Supports Li-Ion and Li-Polymer chemistries.

Hassle-free mounting

Utilizes same mounting bracket as Symbol® chargers for easy wall mounting.

Made of highly rugged aerospace grade aluminium housing.

Includes power supplies and cable.

More efficiency in less space

Charges spare batteries plus the batteries in devices simultaneously and fast.

Tri-color charging indications

A charging LED indicates charging status.



For Pricing or Additional Information Contact:

Global Technology Systems, Inc.
550 Cochituate Road Framingham, MA 01701
800.267.2711 ■ In Europe call: 00800.5390.5390
www.GTSpower.com